

w w w . w e l l p r o . c o m

PLASTIC FLOAT AIR VOLUME CONTROL

FOLDABLE FLOAT WITH BALANCED BUOYANCY

**We
Pro**



*The Water Well
Products
used by
PROFESSIONALS*

**We
Pro**

"Industry's Largest Selection Of Air Volume Controls"



PLASTIC FLOAT AIR VOLUME CONTROL

An Air Volume Control System
With Over Forty Years of Service.
Proven performance by
Independent testing Laboratory.

Only Well Pro has a foldable float with
balanced buoyancy and can be inserted into a
pressure tank through the pipe connection hole.

A Well Pro Float is a barrier to absorption of air by water under pressure. Well Pro Float assures a smooth working water system by separating the volume of air from the water within the pressure tank.



Well Pro Float is made of durable plastic approved by U.S. Food and Drug Administration, for the interior of containers carrying liquids for human consumption.

Only Well Pro Float will stay level on top of water to separate air from water in tank

Dia. Size	Carton Order No.	UPC Bar Code (Qty. 1)	Carton Qty.	Master Carton Qty.	Approx. Wt./Lbs.
12"	WPFC12	6 42367 08150 8	1	12	0.6
16"	WPFC16	6 42367 08152 2	1	12	1.0
20"	WPFC20	6 42367 08154 6	1	12	1.6
24"	WPFC24	6 42367 08155 3	1	12	2.0
30"	WPFC30	6 42367 08156 0	1	12	3.3
36"	WPFC36	6 42367 08157 7	1	12	4.3

FEATURES/BENEFITS

- Simple Economical way to minimize water-logging of pressure tanks.
BENEFIT: Most economical long life air volume control for tanks.
- Plastic Flotation Ring forms a seal** between water and air inside pressure tanks. The air-water seal is assured by Well Pro's Exclusive "Wiper Blade."
BENEFIT: Effective water/air volume separation in the tank.
- Eliminates other air volume controls** or the need for air-charger, bleeder valves, or air-release valves, and headaches caused by corrosion of these parts.
BENEFIT: Well Pro Float will not corrode and is not effected by chlorine.
- Float's Balanced Buoyancy** is assured by a sealed, crush-proof flotation ring within the float even if the tank drains. Well Pro Float resumes its floating position when water returns.
BENEFIT: Balanced buoyancy insures float will maintain flat horizontal position on top of water.
- Well Pro Float is built for permanent service**, yet this water-log barrier can be inserted into place in minutes. The 12" through 20" sizes are flexible enough for insertion through a 1-1/4" tank opening. The 24" size will require a 1-1/2" opening. The 30" and 36" size require a 2" tank opening. Well Pro Float recovers its stable circular shape and assumes its proper position after insertion in tank.
BENEFIT: Can be inserted in existing or new tanks.

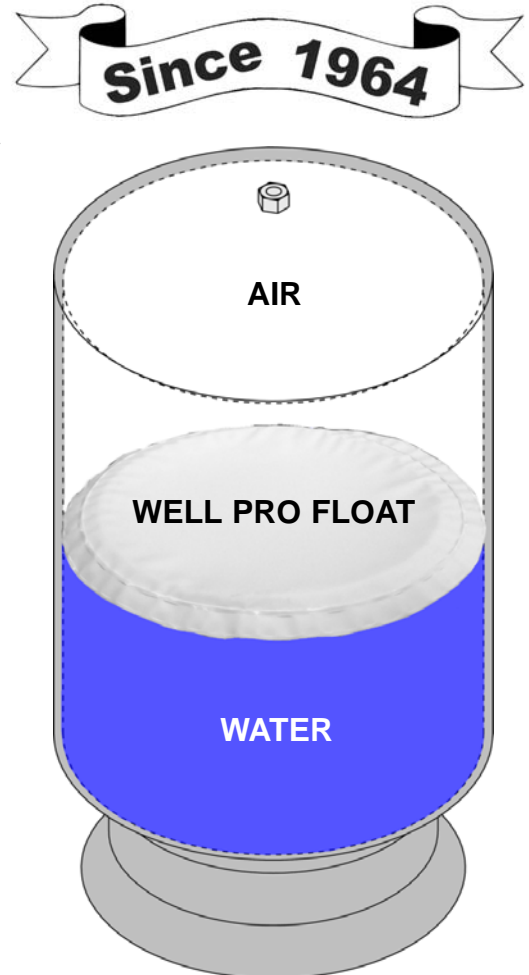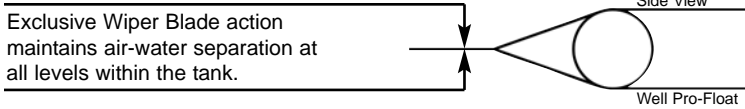

Well Pro Float is available in the following diameter sizes: 12", 16", 20", 24", 30", and 36"

U.S. Patent No. 3,159,301

	CONTACT INFO:	Main/International:(712) 732-7354
		U.S. and Iowa:(877) 888-7059
		Fax:(712) 732-7568
		Fax:(800) 269-3569
Copyright © 2006 WELL PRO		FORM 5012.1 ISSUED 10/06