

w w w . w e l l p r o . c o m

SQUARE D PRESSURE SWITCHES

**We
Pro**



*The Water Well
Products
used by
PROFESSIONALS*

**We
Pro**

"The Best Selection, Quality, and Price"



SQUARE D PRESSURE SWITCHES

Quality Benefits

- Class 9013
- Diaphragm Actuated
- Standard Action : Contacts Open on Rising Pressure
- Connection : 1/4" NPSF Internal
- Individually Boxed



Type WFSG



From S.Q.D. Digest

Switch for Pumping Applications

Order No.	UPC Bar Code (Qty. 1)	Preset Settings (PSI)	Cut Out Range (D) PSI	Approx. Adjustable Differential (PSI)	Approx. Wt./Lbs.
WFSG220CP	6 42367 11470 1	20/40	20-65	15-30	0.85
WFSG230CP	6 42367 11471 8	30/50	20-65	15-30	0.85
WFSG240CP	6 42367 10877 9	40/60	20-65	15-30	0.85
WFSG220BX	6 42367 11472 5	20/40	20-65	15-30	0.90
WFSG230BX	6 42367 11473 2	30/50	20-65	15-30	0.90
WFSG240BX	6 42367 11474 9	40/60	20-65	15-30	0.90

Float Switch for Open Tank or Sump Applications

Order No.	UPC Bar Code (Qty. 1)	Force Up to Trip	Force Down to Trip	Wt. Supported w/Compensating Spring	Approx. Wt./Lbs.
WDG2	6 42367 11475 6	9 Oz.	8 Oz.	60 Lbs.	1.20
Contacts close on liquid rise					
WDG2FORMR	6 42367 11476 3	8 Oz.	8 Oz.	60 Lbs.	1.20
Contacts open on liquid rise					


Plug and Kit

Order No.	UPC Bar Code (Qty. 1)	Description	Approx. Wt./Lbs.
W1530-S6G1	6 42367 11477 0	Nylon Pulsation Plug	.01
WPC-241	6 42367 11478 7	Replacement Contact Kit for WFSG Switches	.20

9013 WFSG Two Pole Electrical Ratings


Voltage	Single Phase AC	Polyphase AC	Control Circuit Rating	DC
115	1-1/2 HP	2 HP	A600	1/4 HP*
230	2 HP	3 HP	A600	1/4 HP*
32	---	---	A600	1/4 HP*

* DC rating does not apply to Form M4

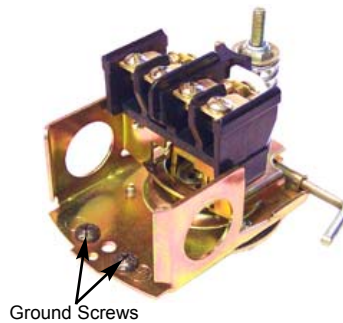

Ground Screws

Pressure Switch interior showing Ground Screws. This feature standard on all switches.

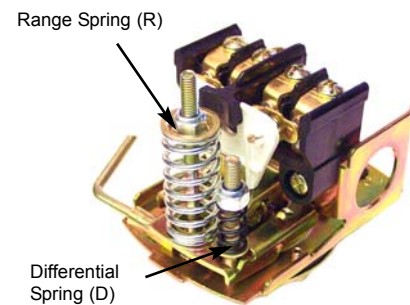

Range Spring (R)

Differential Spring (D)

Class 9013, Type WFSG Interior showing Range and Differential Springs.



CONTACT INFO: Main/International:(712) 732-7354
 U.S. and Iowa:(877) 888-7059
 Fax:(712) 732-7568
 Fax:(800) 269-3569